



SETTING UP APPLIANCE MODULES (AM486)

1. Use a dime or a small screwdriver to set red Housecode dial on Appliance Module to same letter as you set on Controller.
2. Set black Unit Code dial on the Appliance Module to a number between 1 and 16.

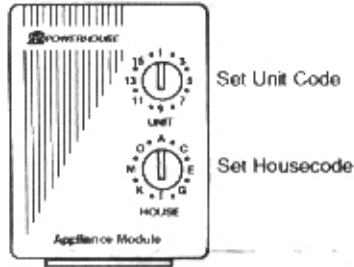

3. Check that the appliance switch is in the ON position, unplug the appliance from its receptacle and plug it into the Appliance Module.
4. Plug the Appliance Module into a standard 120 V AC wall outlet.
5. The appliance may be ON or OFF at this time.
6. Repeat steps above for any other appliance you wish to set up.

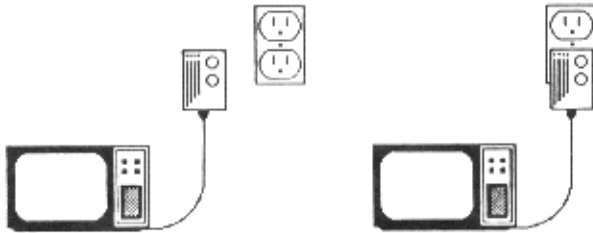

X-10 (USA) INC. LIMITED 1-YEAR WARRANTY

X-10 (USA) Inc. warrants X-10 products to be free from defective material and workmanship for a period of one (1) year from the original date of purchase at retail. X-10 (USA) Inc. agrees to repair or replace, at its sole discretion, a defective X-10 product if returned to X-10 (USA) Inc. within the warranty period and with proof of purchase.

If service is required under this warranty:

1. Return the defective unit postage prepaid to X-10 (USA) Inc. (see address on back).
2. Enclose a check for \$4.00 to cover postage and handling.
3. Enclose a dated proof of purchase.
4. X-10 is not responsible for shipping damage.
Units to be returned should be packed carefully.
5. For additional warranty information, contact X-10 (USA) Inc.

Your Name

Address

Date Purchased 19 Store where purchased

AM486 1191

From

X-10 (USA) Inc.

91 RUCKMAN RD., BOX 420, CLOSTER, NJ 07624-0420

First Name

Last Name

Street Address - No P.O. Box numbers (for U.P.S.)

City

State

Zip

CONTENTS - MERCHANDISE

RETURN POSTAGE GUARANTEED

POSTMASTER: THIS PARCEL MAY BE OPENED FOR POSTAL INSPECTION

**X-10 (USA) Inc.
91 Ruckman Rd., Box 420,
Closter, NJ 07624-0420**

CONTROLLERS

Remote Powerline Siren PH508

Works with PF284 *POWERFLASH* Interface, SS5400/HS9000 Supervised Security System or PS561 Console to give a very loud 110 decibel siren at a remote location.

Mini Timer MT522

It's a Controller a Timer and an Alarm Clock all in one! Programs up to 4 Modules to go on and off at specific times, up to twice a day. Controls 8 modules instantly. Dims lights too.

Maxi Controller SC503

Lets you control up to 16 X-10 Modules at the touch of a button from anywhere in the house. Dims lights too!

Mini Controller MC460

Lets you control up to 8 X-10 Modules at the touch of a button from anywhere in the house. Dims lights too!

Home Control Interface CP290

Programmed from an IBM, Mac, Apple IIe/IIc or Commodore 64/128 to control up to 256 X-10 Modules. Software & cable included.

Thermostat set-back TH2807

Automatically sets back your central heating/air conditioning. Mounts on the wall under your existing thermostat and plugs into an Appliance Module.

Wireless Remote Control System RC6500

Controls 2 X-10 modules from inside or outside your home from up to 100 ft. Can be expanded to control up to 16 modules by adding an RT504 Remote Control. This also lets you dim and brighten Lamp Modules and Wall Switch Modules.

MODULES

Lamp Module LM465

Can be Dimmed and Brightened from a X-10 Controller. Responds to "All" lights only. Rated for 300 W. Incandescent lam only.

Appliance Module - AM486/AM466

Two pin polarized (AM486) or 3 pin ground (AM466). For controlling an air conditioner, TV, stereo, etc. anywhere in the home. Rated 15A for heaters, coffee pots etc.; 1 H.P. for motors, 400W for TVs, 500W for lamps (because of the inrush current from cold lamp).

Wall Switch Module WS467

For controlling important indoor and outdoor security lights. Replaces your existing wall switch and installs like a regular dimmer. Can be dimmed and brightened from a X-10 Controller. Rated for 500W incandescent lamps only.

3 - Way Wall Switch Module WS4777

For controlling a light which is presently controlled by two switches. Same features WS467.

Split Receptacle Module SR227

Replaces your existing wall receptacle. The top receptacle functions like an Appliance Module and the bottom receptacle is a regular outlet. Rated for 15A unconditional, i.e. will control ANYTHING which would normally plug into a regular AC wall outlet.

Universal Module UM506

Isolated contact relay and beeper. Can be set for momentary or continuous operation. Not compatible with SS5400 and HS900 security systems or BC531/PS561 Console.